

BAIYILED LED FLAT PANEL LIGHT

PLC Series 40W

Product Features

Enjoy savings up to 70% and zero maintenance without compromising on brightness or light quality. The Baiyiled PLC panel light combines unique diffuser with exceptional energy-efficiency to create a very pleasant light source with low glare (UGR <19) and with excellent colour rendering.

Low inrush current control circuit feature for ease of installation in retrofit situations

Excellent harmonic characteristics, no flickering with a power factor of 0.95

BAIYILED PLC LED panel light has been certified by TÜV, CE, RoHS, LM79, etc. It has also been tested by many other European institutes and labs with excellent results.




Applications

Offices
Supermarkets
Retail
Hospital
Hotel
Factories

Parameters

Lifespan	50000H	
Rated power	36W	
Voltage	AC 90-264V 50Hz/60Hz	
Lamp size	36W	595 x 595 x 0.93 mm 295 x 1195 x 0.93 mm
Beam angle	140°	
CRI	≥85	
Color temperature	3000K/4000K/6500K	
Luminous flux	36W 3780lm	
Working environment	-20°C~45°C	
Mounting	Recessed / Ceiling	
Power factor	>0.95	
UGR	<19	
Dimmable	1-10v Dimming	

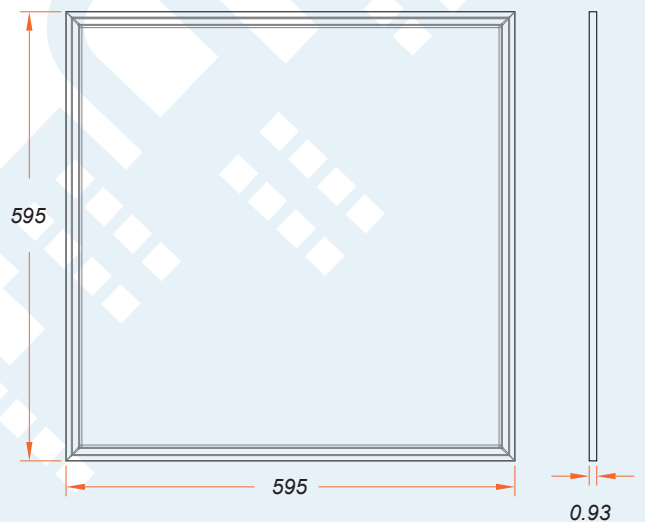

BAIYILED

BAIYILED EUROPE B.V.
Koningsbeltweg 72A
1329AK Almere
The Netherlands

Email : Info@baiyiled.nl
Tel : +31 (0)36 7850321
Website: www.baiyiled.nl