

# BAIYILED SDB LED Low-Bay luminaries

SDB Series 65W / 130W

## Product Features

Enjoy savings up to 70% and zero maintenance without compromising on brightness or light quality.

BAIYILED SDB LED Low-Bay luminaries were designed specifically to replace conventional lighting in a wide variety of industrial applications; both indoor and outdoor.

The Low-Bay fixture has a small profile and light weight, it is ideal for many applications such as indoor and outdoor car parks, garages, cold storage, tunnel and general area lighting applications with mounting heights 4 - 6 meters.

SDB Low-Bay offers customers all the benefits of LED lighting— instant on and off, excellent light quality, longer lifetime, and reduced energy consumption and maintenance.

It is equipped with top quality Cree LED chip and has been certified by CE, RoHS, LM79, etc. SDB LED Low-Bay has also been tested by many other European institutes and labs with excellent results.








## Applications

- Manufacturing
- Warehouse
- Distribution-center
- Retail
- Tunnel
- Cold storage
- Garages

## Parameters

Lifespan	50000H	
Rated power	65W / 130W	
Voltage	AC 176-264V Hz50/Hz60	
Lamp size	65W	320 x 300 x 130 mm
	130W	500 x 300 x 130 mm
Beam angle	120°	
CRI	≥80	
Color temperature	3000K/4000K/5000K/6500K	
Luminous flux	65W	6500lm
	130W	13000lm
Working environment	-30°C~50°C	
Protection rate	IP66	
Power factor	>0.95	
Power efficiency	>88%	
Dimmable	Optional	

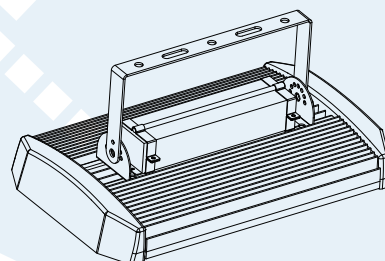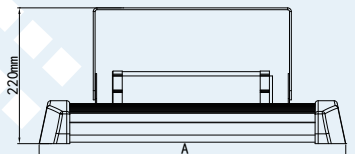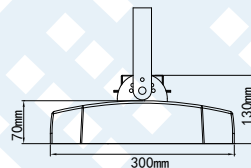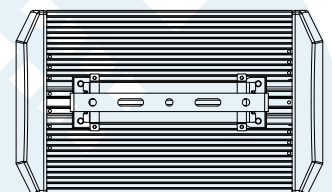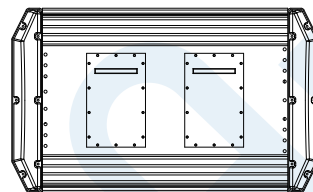

	A
SDB 65W	320mm
SDB 130W	500mm

# BAIYILED

BAIYILED EUROPE B.V.  
Koningsbeltweg 72A  
1329AK Almere  
The Netherlands

Email : [Info@baiyiled.nl](mailto:Info@baiyiled.nl)  
Tel : +31 (0)36 7850321  
Website: [www.baiyiled.nl](http://www.baiyiled.nl)